

GUIDE

V1.02

Wuhan Guide Technology Co.,Ttd.

		1
1.1 USB	HF500	1
1.2		3
		5
2.1		5
2.2		5
2.3		5
		6
3.1		7
3.2		8
3.3		8
3.4		9
/		10
		10
/ /		11
6.1		12
6.2		12
6.3		13
6.4		13
		13
		14
8.1		15
8.2		15
		18
		19
		20
BootLoader		20



1.2

- 1 232 USB
- 2 WIFI
- 1 232 USB
- D 232 USB




RJ45



D

3	2	RX

4	3	TX
1	1	V+
2	5	GND

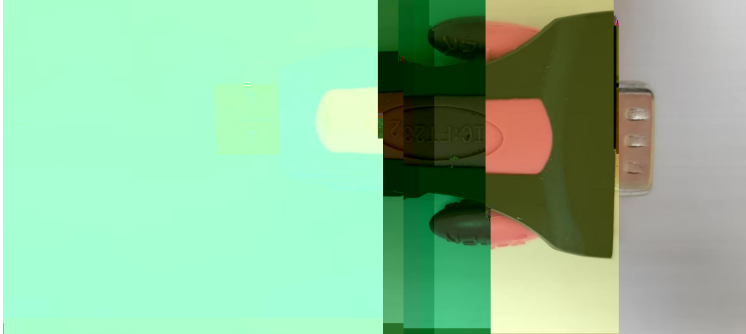

232 USB

2 WIFI

WIFI

RJ45

USR-VCOM

“ 1.1 USB

”

WIFI



WIFI



TCP Client

IP

10.10.100.254

8899

Select Database File

Select Language



3.1



“ ”



“ ”



COM



COM





端口: COM1 初始化功率: [19] 250kW


3.2



AFE

108.15/108.16

3.3

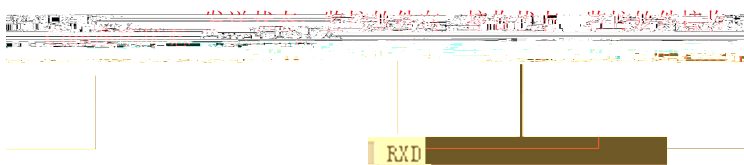

2



“

”

/

J3



COM

PORT

COM

(COM

->

)



“ ”

“ ”

TXD

“ ”

PORT TXD RXD




Com



ModBus

1

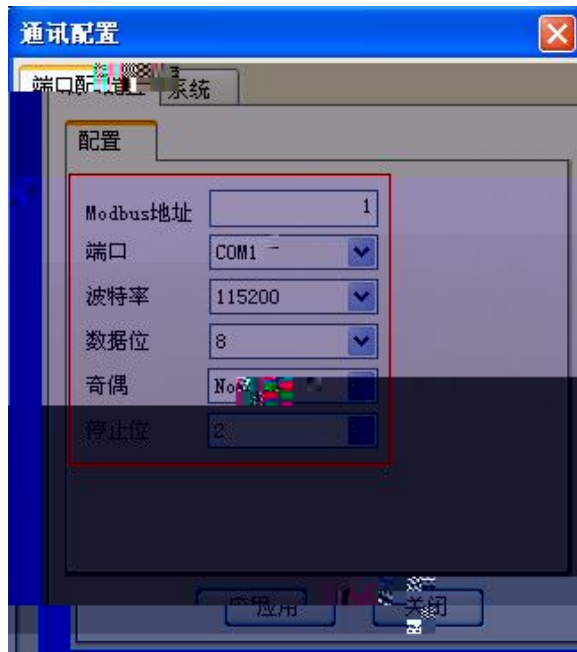

“ ”

/ /



“ ” “ ”

6.1

☐ 所有参数 ☒ 参数组

“

” “ ”



“ ”



“ ”



xls



xml



xml


参数对比

“ ” “ ”

6.2

“ ”

P16

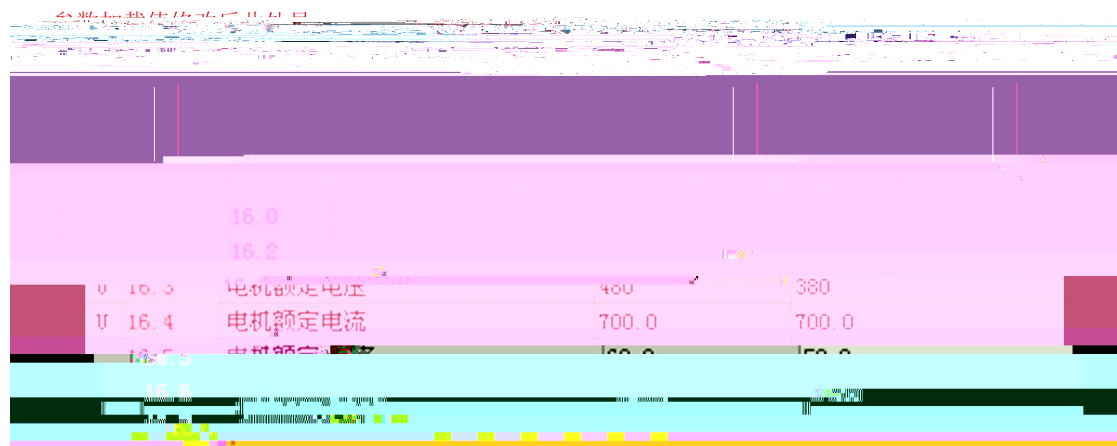

“ ”

FLASH


FLASH




FLASH

“ ”

6.3




xls




(P0)

“ ”

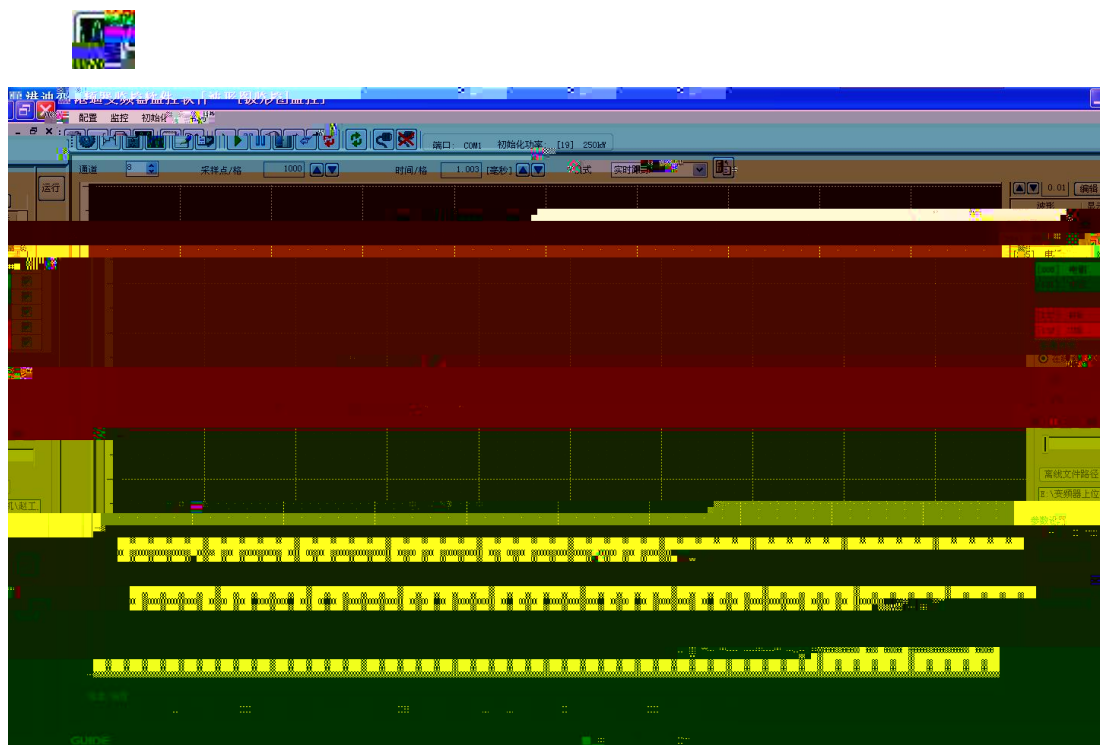

8.1

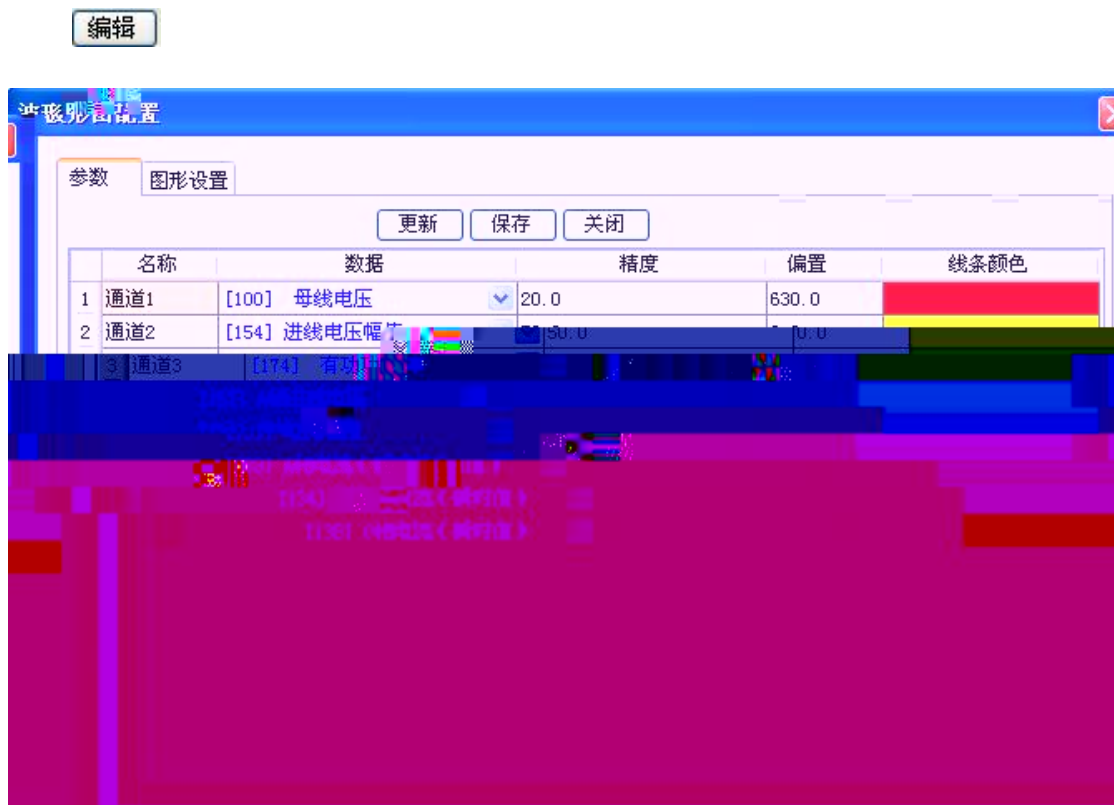


8




49

8.2


1

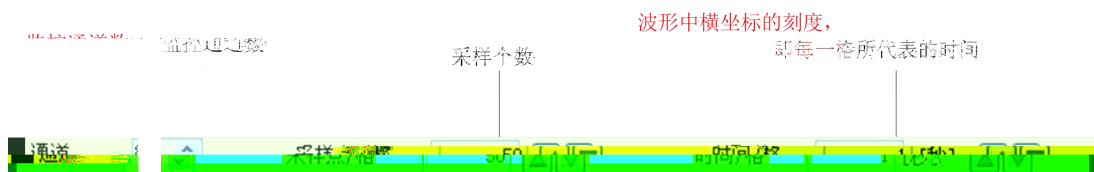

波形图/线条图 单击在波形图中

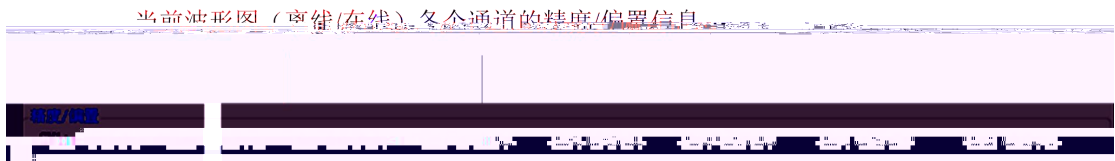

“ ” / 100 / 1 /
“ ” / “ ”



$$0.5 \times 20 = 10$$

2



A. “ ”

B. “ ”

\$\GuideInvSoft\OffLineData\WaveTrace

“ COM _ _ _onOffLine.data ”

100M

C. “ ” “ ”



3

运行

停止

4

A.

B.

D

C.

D.

“ ”

“ / ”

“ ”







跟踪

错误发生前

错误发生时

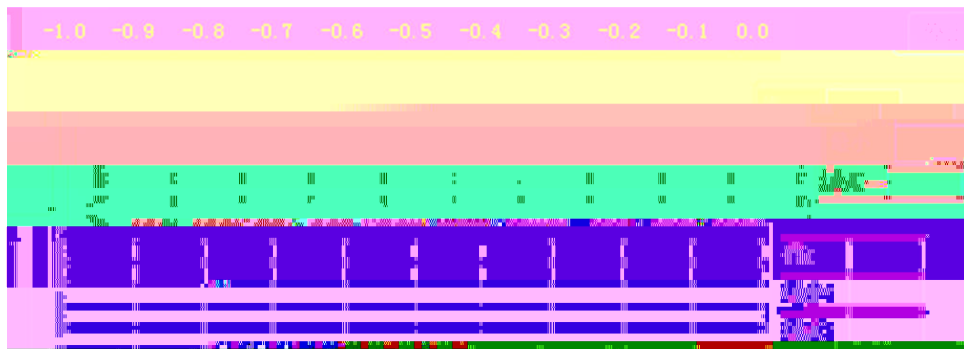

0.0 -1.0 0.0

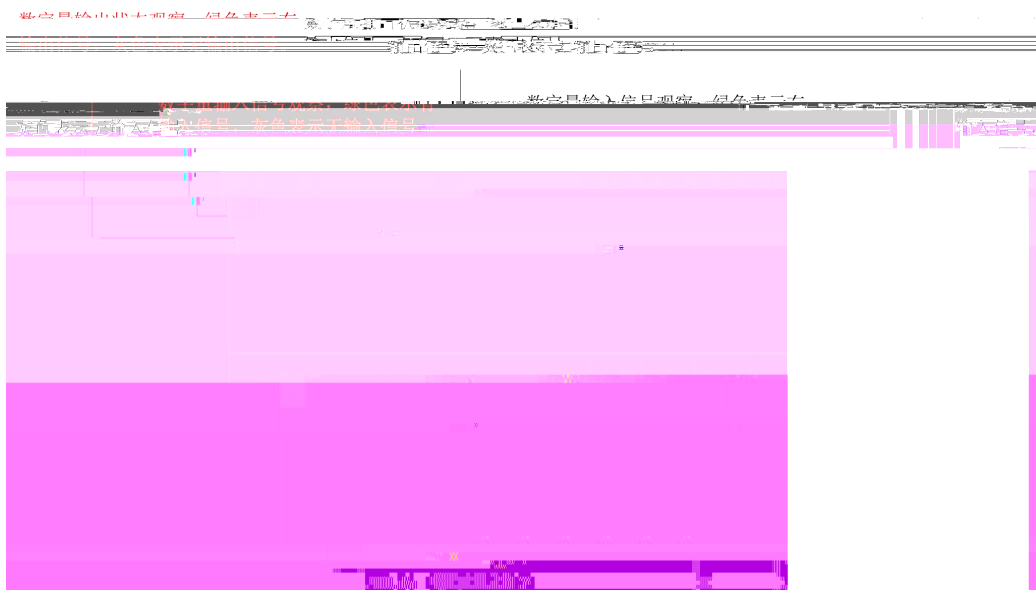

1



DSP

BootLoader

DSP

flash



232