


GUIDE

EtherCat

GDHF681N4EC01A

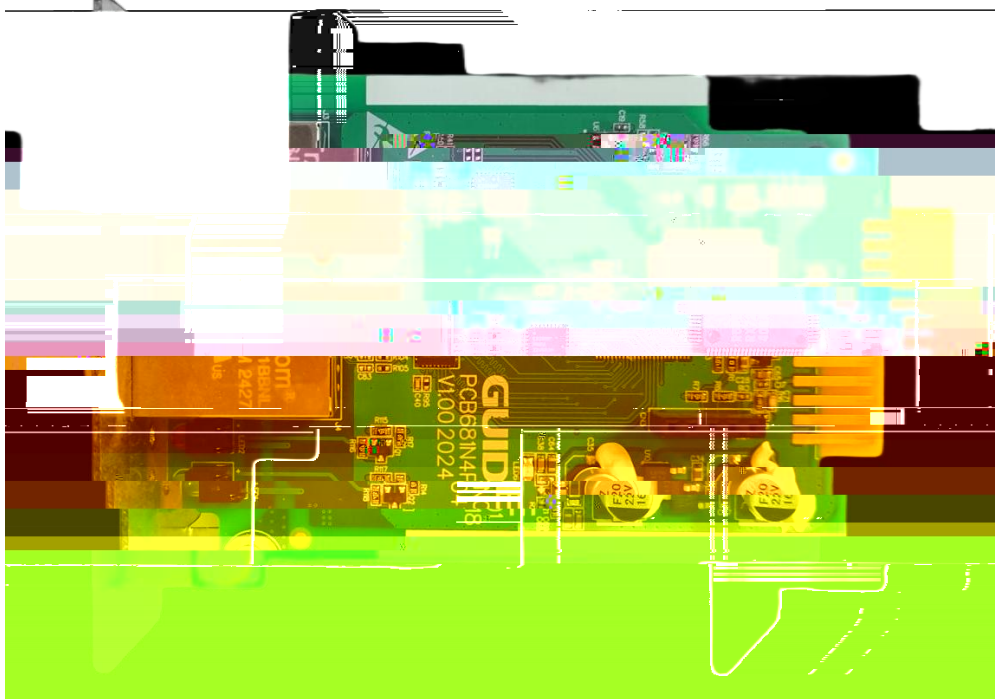

Wuhan Guide Technology Co.,Ltd.

EtherCat

EtherCat

EtherCat

EtherCat

PP0

LED

EtherCat

EtherCat

EtherCat

GDHF681N4EC01A

!

EtherCat

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

LED


EtherCat

WW

WW

W

W

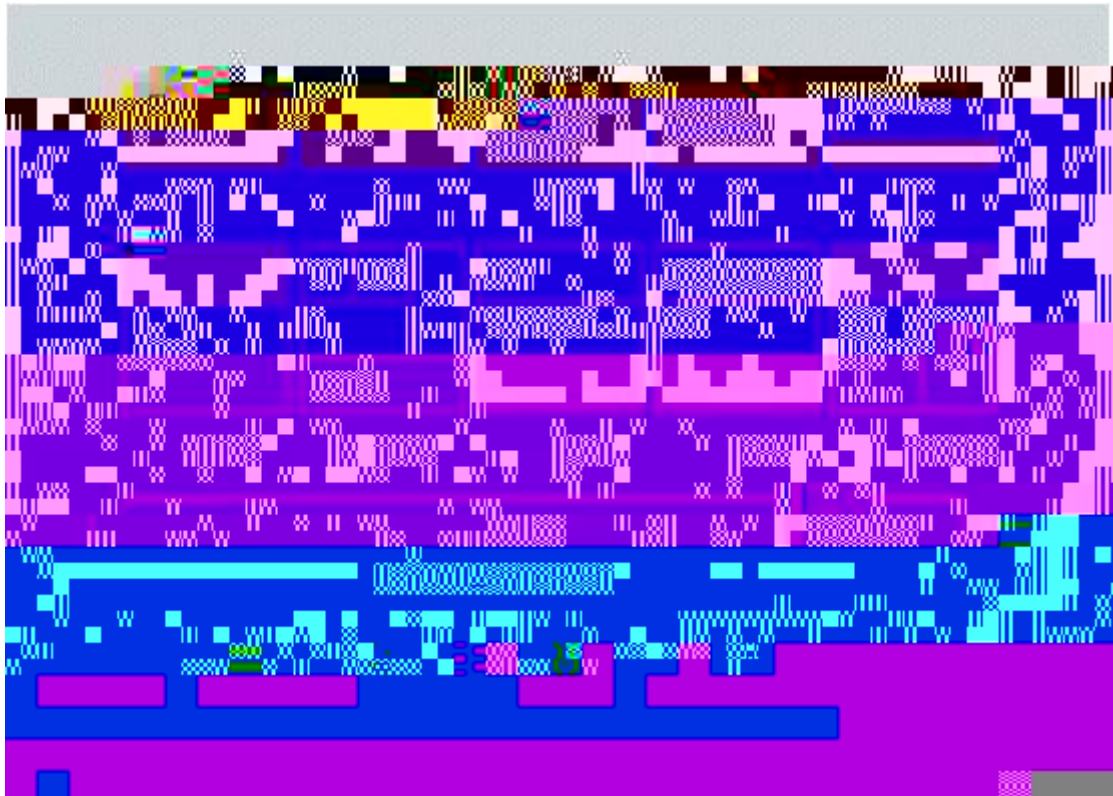

EtherCat

GDHF681N4EC01A

HF681N

EtherCat

EtherCat

EtherCat

GDHF681N4EC01A

•

Σ 8 Ἀ

8 ΕC-12 , CXCῶ ἈῦἈτ ΕΒἈ , CXCΟ! ρ τ ΕΒ OC8
τ ΕΒἈ _B* _ Ἀ! Δ ΧἈ!Ἀ!Ἀ! € Ε Ν 8g : ~ Χ2!Γ8

CXO

, ρ θ _ J (ΛΗΓ8DΛ• ἈΒ, Κ! J Ἀ

, ϕ _ Ε +) J3+C J ρ QEE Ο ≠ Ἀ

ἈΒ, > : C × ὀ - € Ο

ϕ _ Ε (ΛΗΓ8DΛ J Σ2• ΚἈ!Εθ8 *, +) J (8 ϕΕJ

- € M

>Εε Ο ≠ η × τ _ ΕJἈΒ, 1M...- -(Ε Ἀ

(ΛΗΓ8DΛ J Σ2• ΚἈ!Εθ8 *, +) J (8 ϕΕJἈΒ,

,) Εε Ο ≠ Ε >| η Γ| = } Ἀ

, ! Εε Ο ≠] ρ | Ἀ

, ρΕε Ο ≠] Β+ (8J , Ν! Γὀ| Ἀ

2 Ε , Ἀ

, ἈΕε Ο ≠ , 3' Β38s ~ ΕJ0 ΣΕ≠0: | Γὀ| ΕΕ≠0:

, 2 Εε Ο ≠ ΕJΕΟΟ ΕΕ8 2 Ε , Ἀ

Jῶ Ἀ

!

5

-
- - EtherCat

5

EtherCat

GDHF681N4EC01A

RJ45-1

RJ45-2

RJ45-1	A
RJ45-2	B


A

B

EtherCat

5E

TIA/EIA-568-B

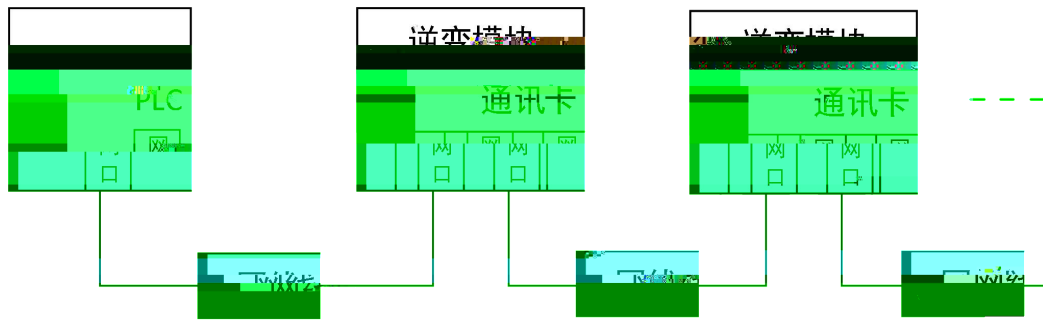

EtherCat

EtherCat

EtherCat

GDHF681N4EC01A

EtherCat

GDHF681N4EC01A

(ESI)

www.gdetec.com

ESI

GSDML- -GUIDE-ET.XML

EtherCat

GDHF681N4EC01A

EtherCat

EtherCat

P33.0	[0]	0	1	0
	[1]			
P33.2	[0]PP01	0	2	1
	[1]PP02			
	[2]PP05			

P33.46	[W0]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000 [5] [%] × 1 [6] [%] × 10 [7] [%] × 100	0 4	0
...	...	...	...	...

EtherCat

[0] EtherCat

[1] EtherCat

EtherCat

PP0 Parameter/Process Data Objects, /

EtherCat PP0

2 PP0

PPP05

HF681N

PLC

HF681N

Ä

òX

ÉÃð ð]

EÃ* !”

EVt

ið ð

ðð ð

Ä

EtherCat

EtherCat

EtherCat

EtherCat

M

GDHF681N4EC01A

EtherCat

PP0 Parameter/Process Data Objects

/

PP0

PP0

	W 0	W 1	W 2	W 3	W 4	W 5	W 6	W 7	W 8	W 9	W 10	W 11	W 12	W 13	W 14	W 15
PP01	W0	W1	W2	W3	W4	W5										
PP02	W0	W1	W2	W3	W4	W5	W6	W7	W8	W9						
PP05	W0	W1	W2	W3	W4	W5	W6	W7	W8	W9	W10	W11	W12	W13		

PLC				
W0	PA_CTRL	bit		
				' 0 '
		0	PA_ENABLE	
				' 1 '
				' 0 '
		1	WRITE	
				' 1 '
				' 0 '
		2	SAVE_to_FLASH	
				' 1 ' FLASH
	3			
	~	Reserved		
	15			
W1	Address	byte	[15..08]	[07..00]
		Data		
W2	0		0	
W3	Data		16	

PLC

bit

0	Reserved
---	----------

1	Reserved
---	----------

‘ 0 ’

```
2    SAVE_to_FLASH    ' 1 '
```

PA_STATUS _____ FLASH _____

WO ‘ O ’

```
3  ILLEGAL_ADDRES
```

S ' 1 '

~ Reserved

15

```
byte      [15..08]      [07..00]
```

W1	Address	Data
----	---------	------

W2 0 0

W3 Data 16

Data

W2 0 0

W3	Data	16
----	------	----

CW0.3 RESET

‘ 0 ’

‘ 1 ’

CW0.4 External FAULT

CW0.13		' 01 ' 2 ' 10 ' 3 ' 11 ' 4
CW0.14	TORQUE_ZERO	' 0 ' ' 1 '
CW0.15	FREE_RUNNING_STOP	' 0 ' ' 1 '

SW0.0	READY	' 0 ' ' 1 '
SW0.1	RUN	' 0 ' ' 1 '
SW0.2	FAULT	' 0 ' ' 1 '
SW0.3	MOTOR BRAKE	' 0 ' ' 1 '
SW0.4	WARNING	' 0 ' ' 1 '
SW0.5	DIRECTION	' 0 ' ' 1 '
SW0.6	M_STEP0	1 ' 0 ' 1 ' 1 ' 1
SW0.7	M_STEP1	2 ' 0 ' 2 ' 1 ' 2

SW0.8	M_STEP2	3 ' 0 ' 3 ' 1 ' 3
SW0.9	M_STEP3	4 ' 0 ' 4 ' 1 ' 4
SW0.10	Reserved	
SW0.11	Reserved	
SW0.12	REMOTE/LOCAL	/ ' 0 ' ' 1 '
SW0.13	Reserved	
SW0.14	MOTION SEL	' 00 ' 1
		' 01 ' 2
SW0.15		' 10 ' 3
		' 11 ' 4

16

1

15

EtherCat

EtherCat

16

EtherCat

LED



GDHF681N4EC01A

2

LED

LED

Err

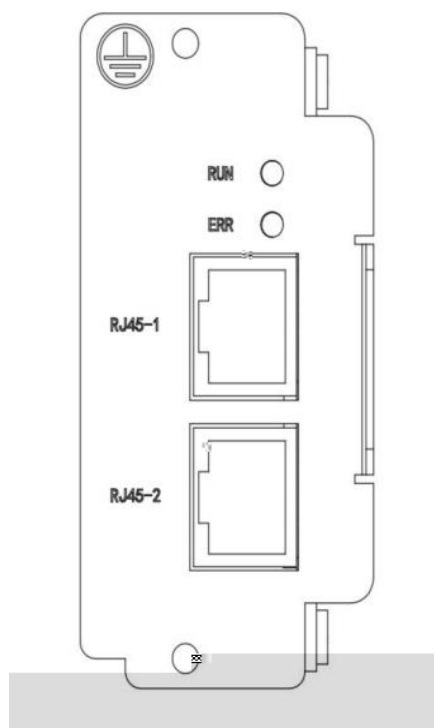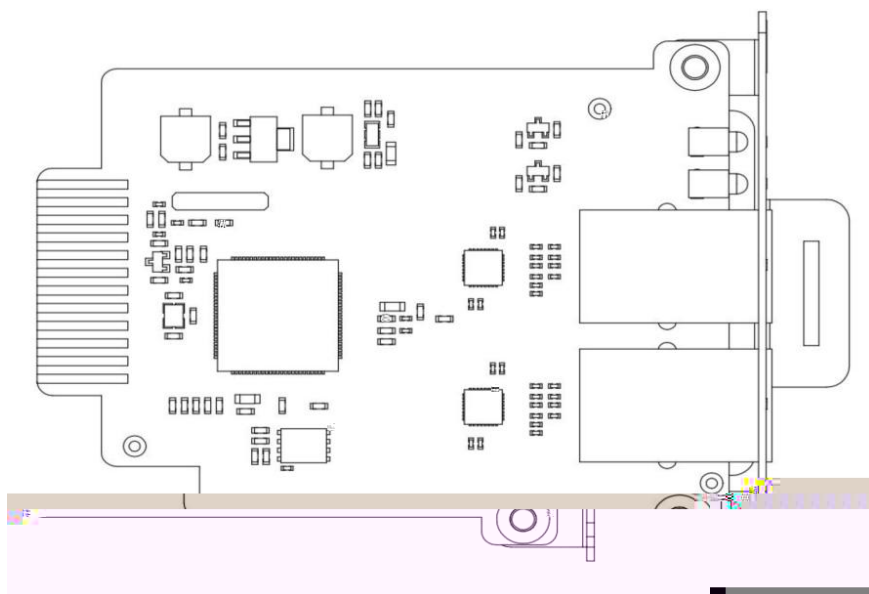

EtherCat

HF681N

- EtherCat
-

EtherCat

EtherCat

5E

TIA/EIA-568-B

	A EtherCat	B DIN 19245 Part1	
	135~165(3~20MHz)	100~130(f>100kHz)	W
	<30	<60	pF/m
	<110	--	Ω /km
	>0.64	>0.53	mm
	>0.34	>0.22	mm ²

100

100Mbit/s

EtherCat

Wuhan Guide Technology Co.,Ltd.

6

430223

86-027-87927230

shfw@gdetec.com

www.gdetec.com

400-0077-570