

GUIDE

HF680NLC

400V

250-630kW

1.00

L

Wuhan Guide Technology Co.,Ltd.



.....	1
.....	1
.....	5
.....	5
.....	6
.....	6
.....	6
.....	7
.....	9
.....	14
.....	14
.....	14
.....	20
.....	21
.....	22
.....	23
.....	23
.....	25
.....	25
.....	25
.....	30
.....	34
.....	34
.....	35
.....	35
.....	36
.....	36
.....	37
.....	37
.....	38
.....	45
.....	45
.....	46
.....	51
.....	51
.....	71
.....	77
.....	77
.....	83
.....	83
.....	83
.....	85
.....	87
.....	88
.....	90
.....	92



.....	95
.....	98
.....	101
.....	104
.....	105
.....	107
.....	108
.....	110
.....	113
.....	116
.....	119
.....	122
.....	127
.....	132
..ü.....	137





Z
H
Θ
I
K

∞


U ∞ V ∞ W

L

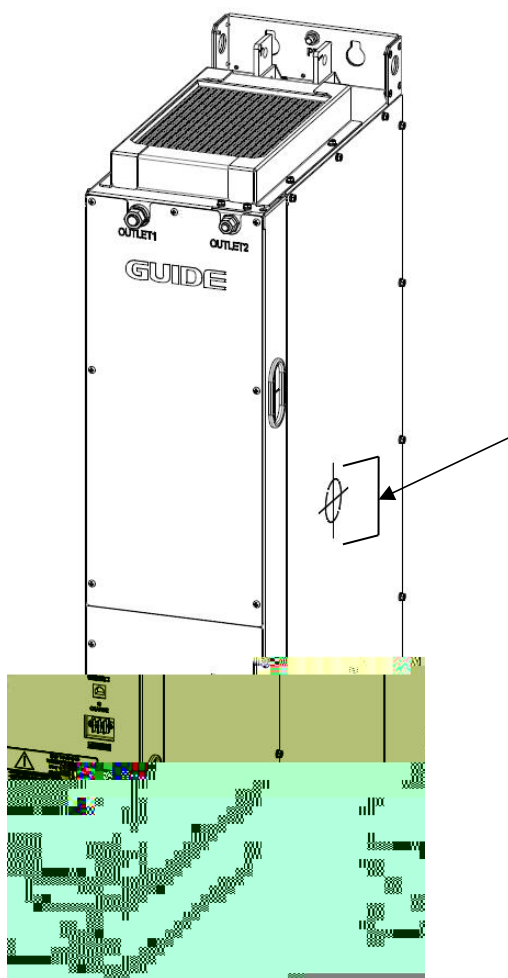

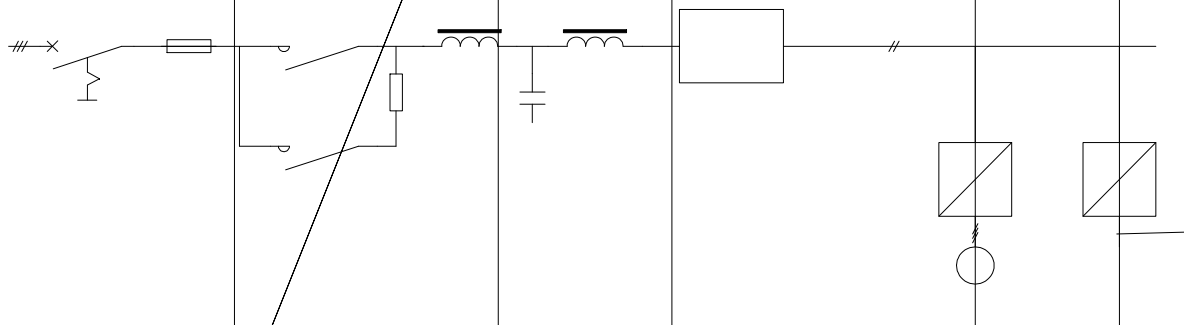


GUIDE

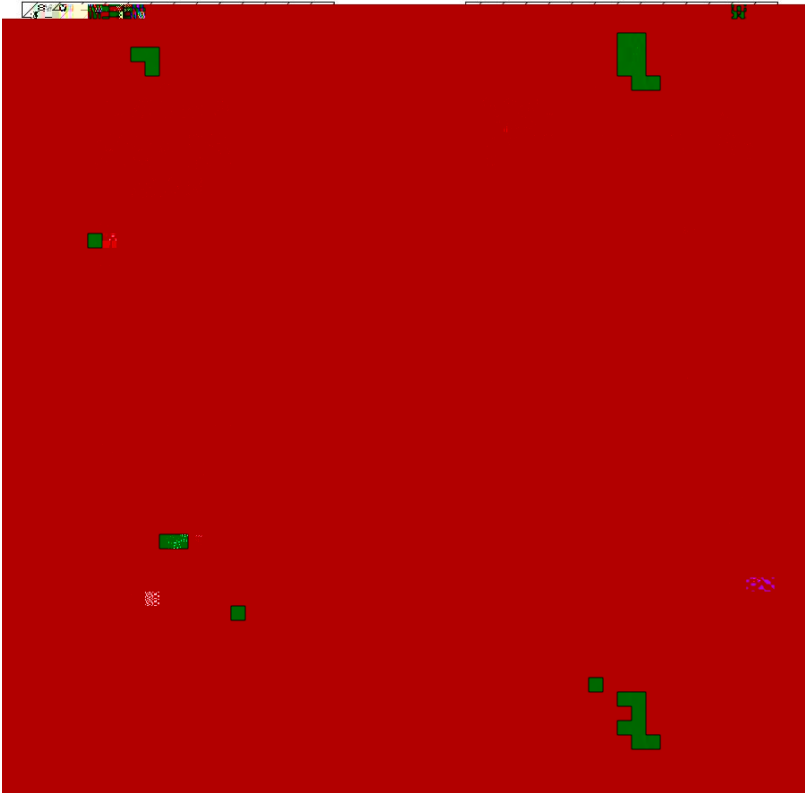

1

2

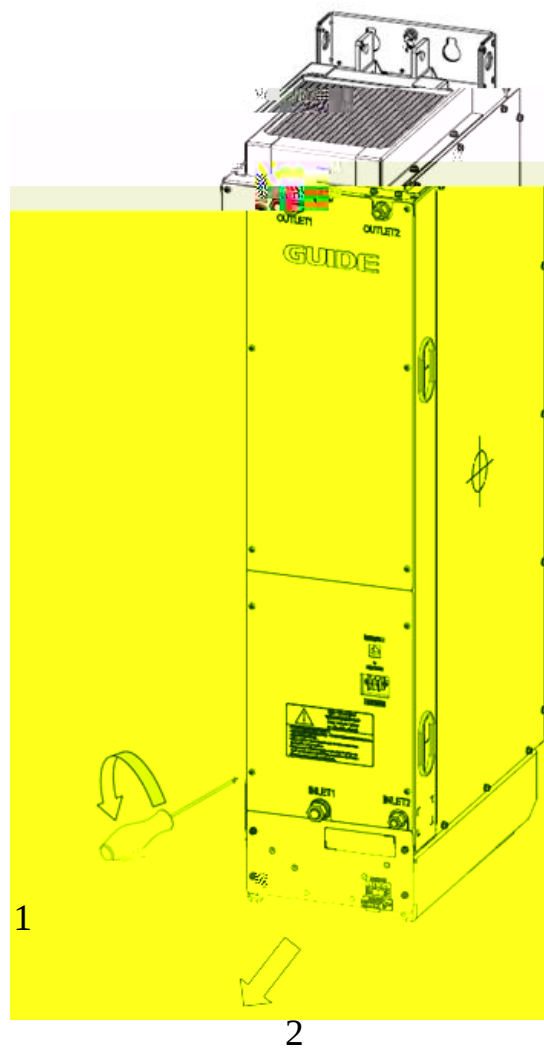


1




2



3


4


5

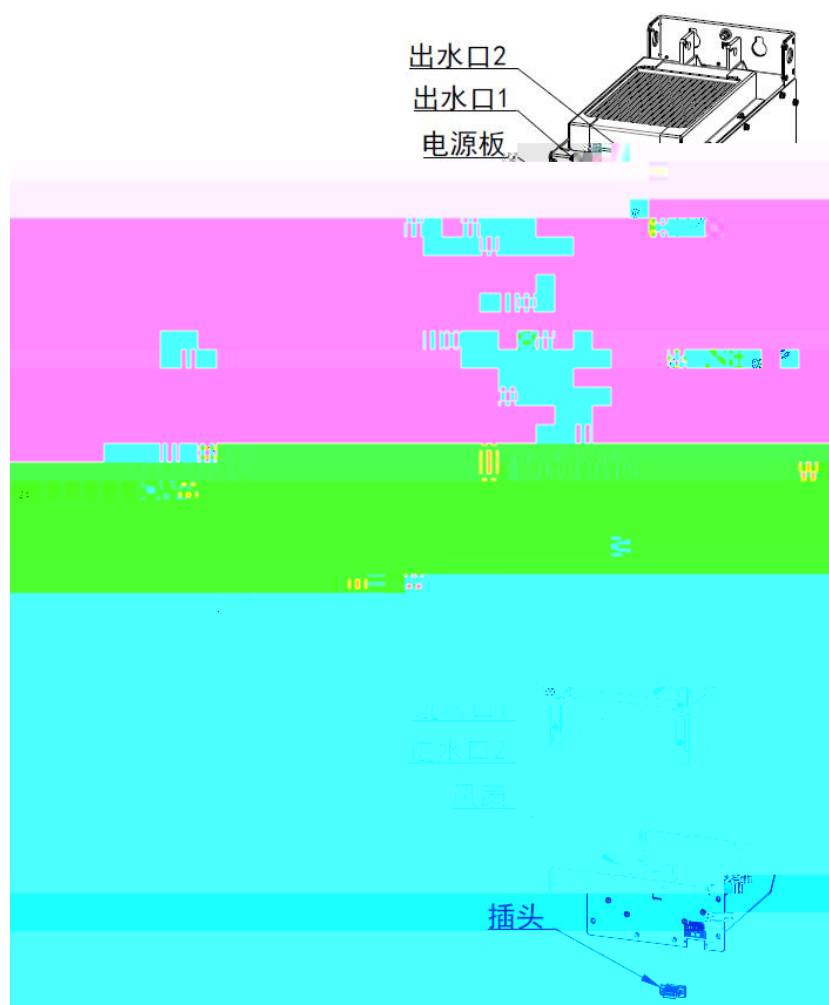

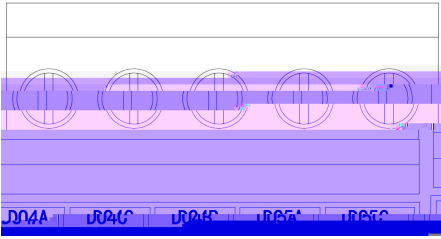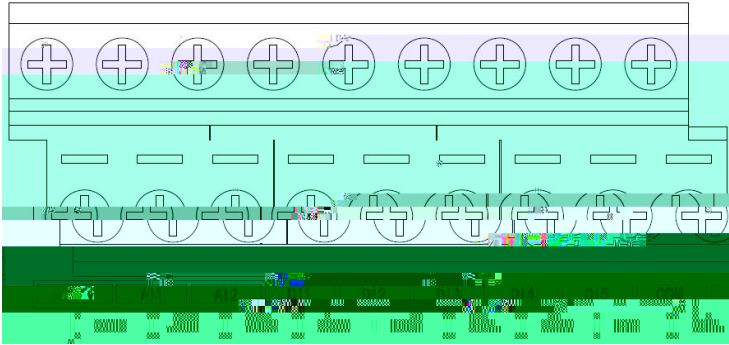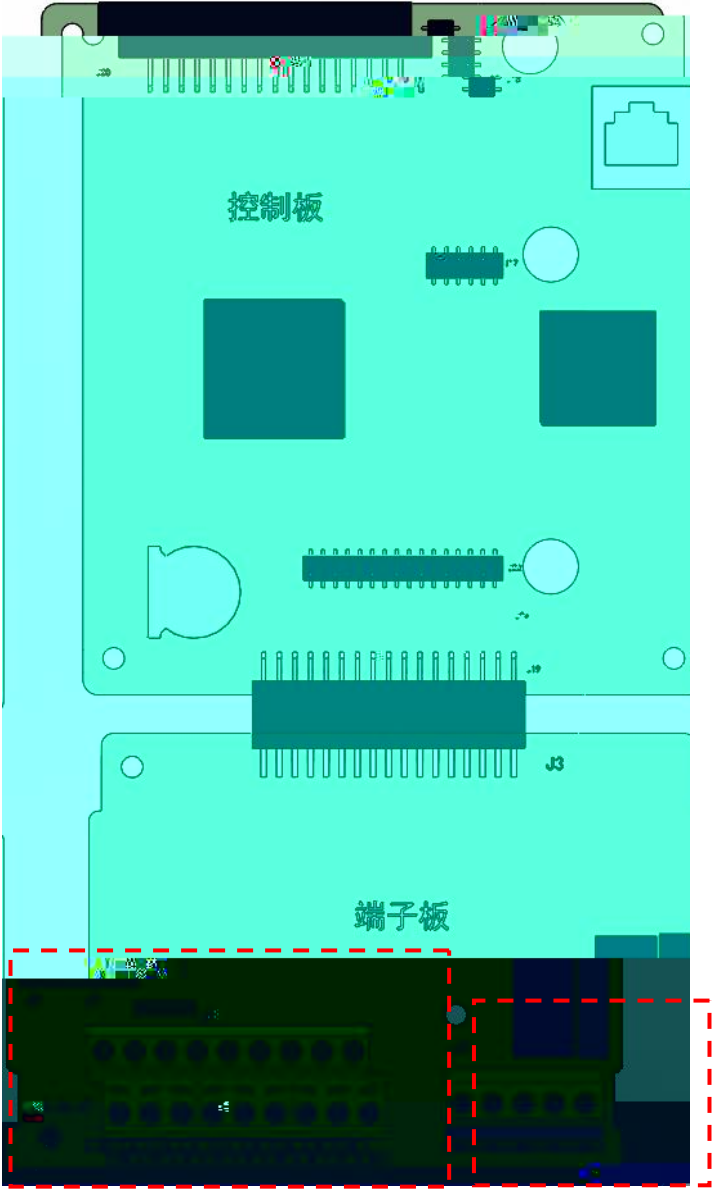

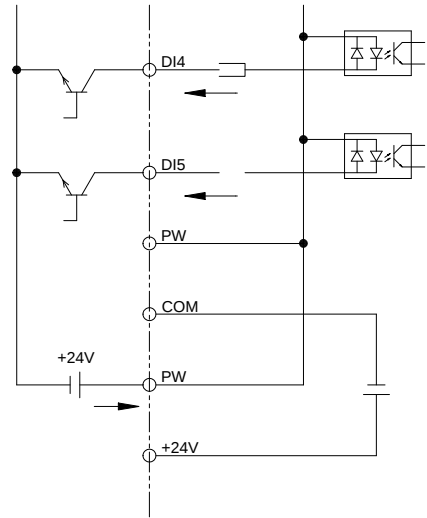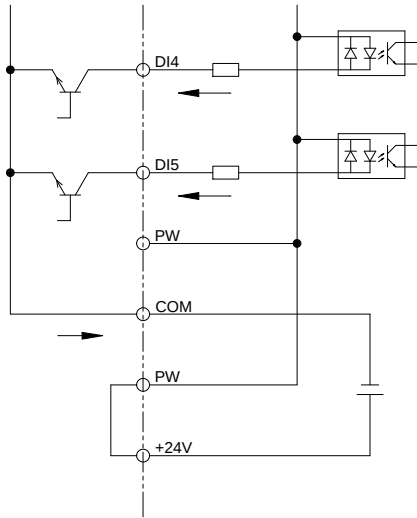

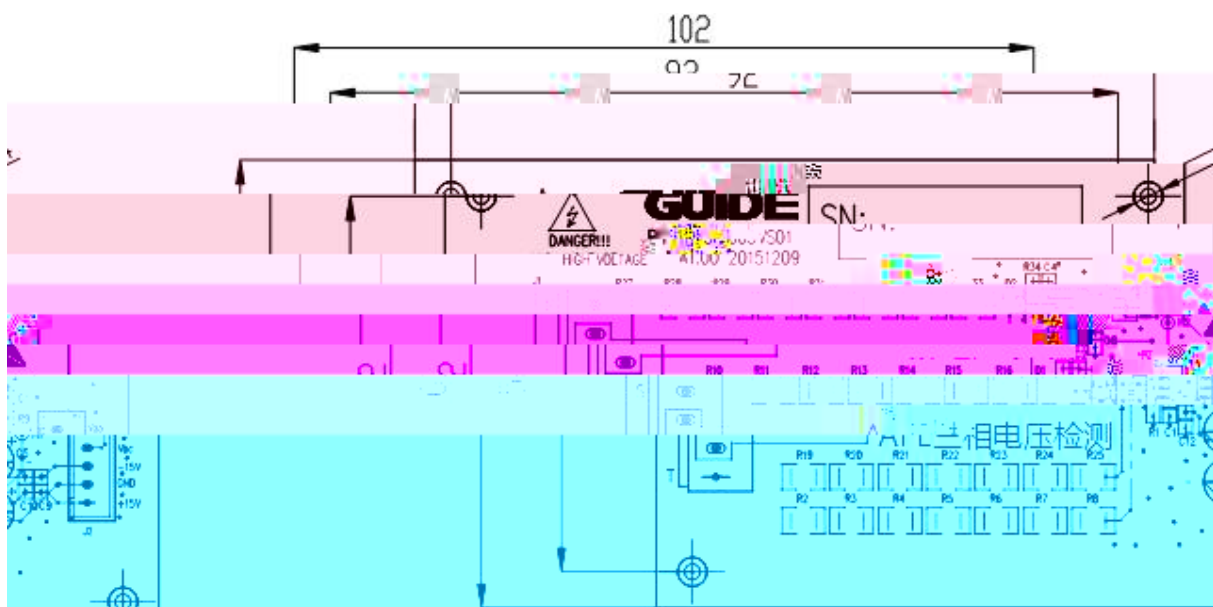


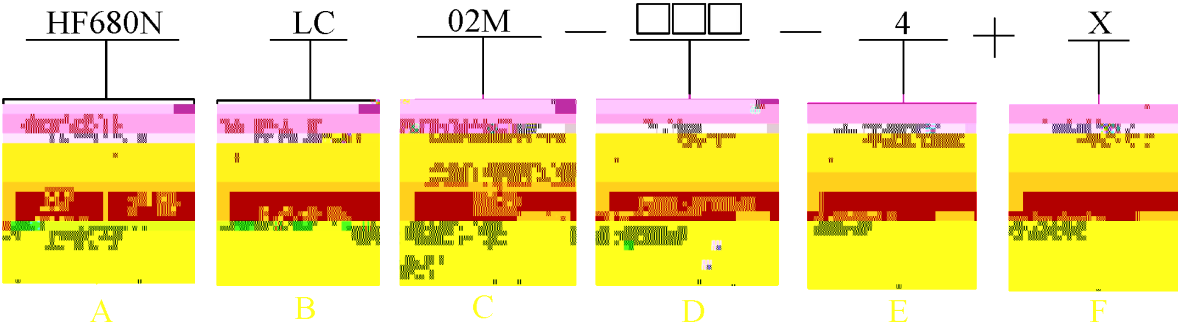

1

LCD

2

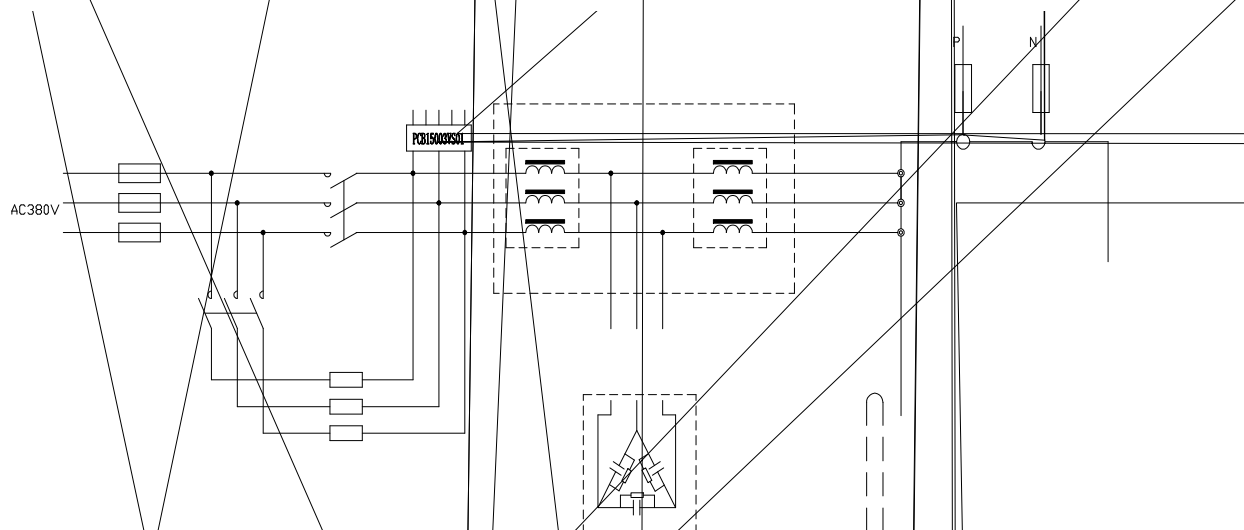

(1)

(2)

(3)

(4)

(5)

(6)

(7)

(8)

(9)


(10)




(11)



(12)

(13)

(14)

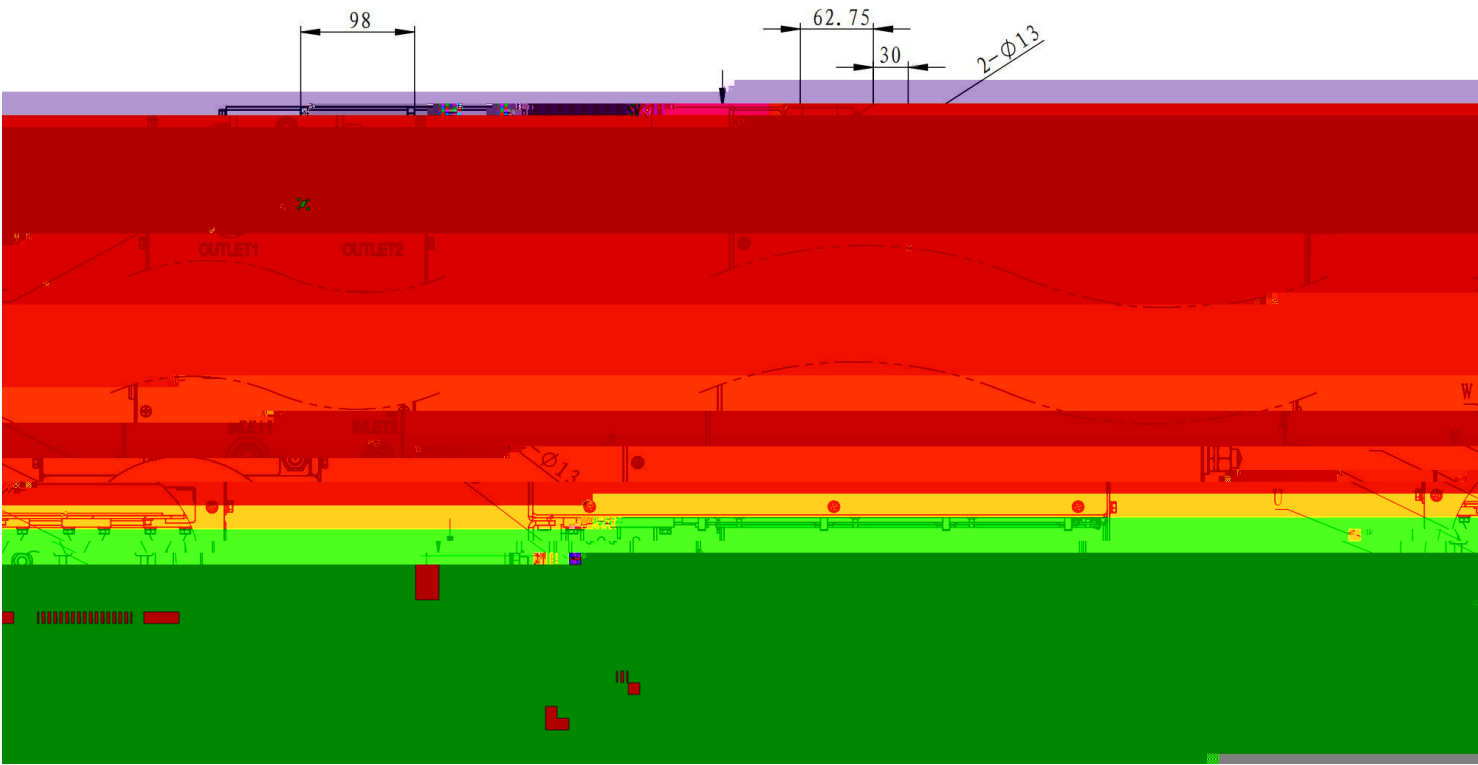

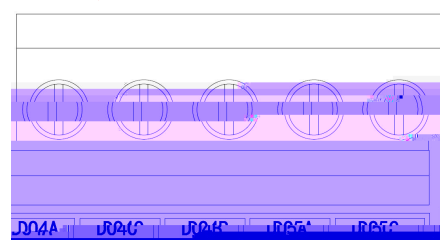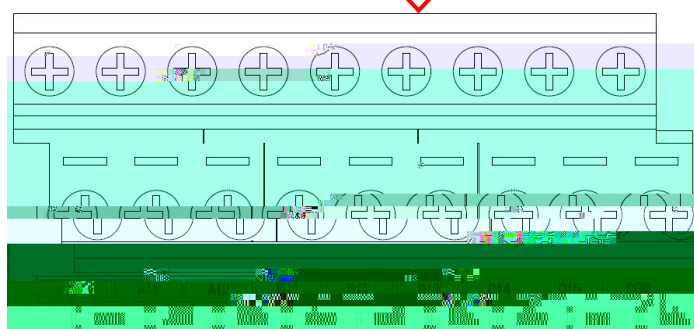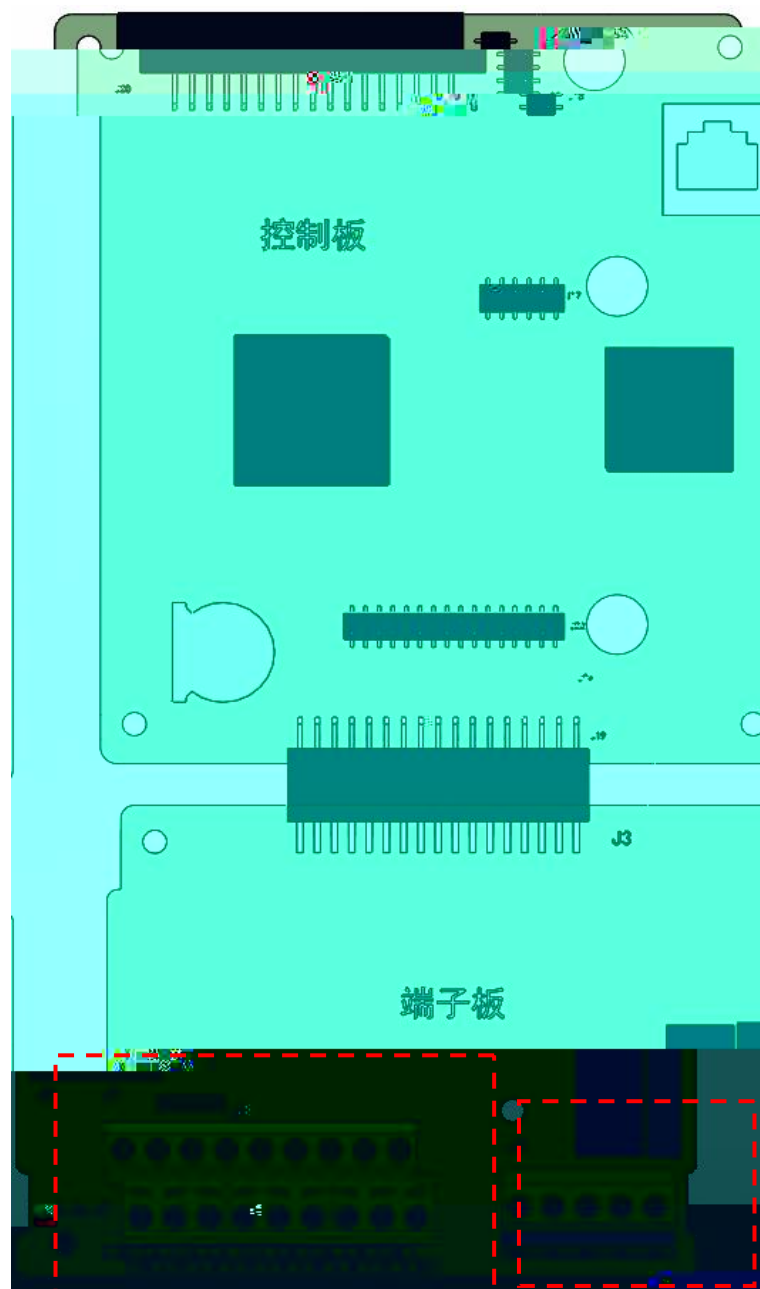

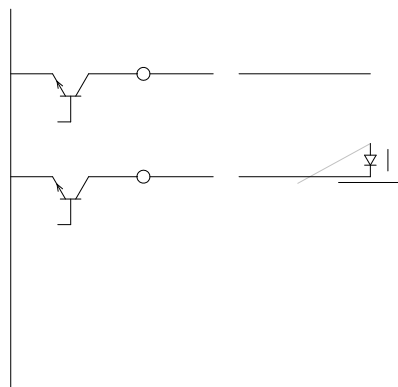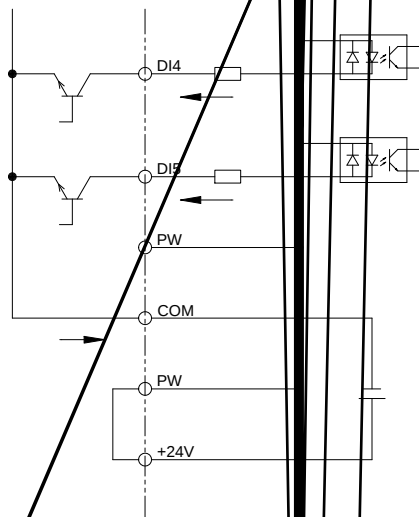


MO


M

M



12


GUIDE

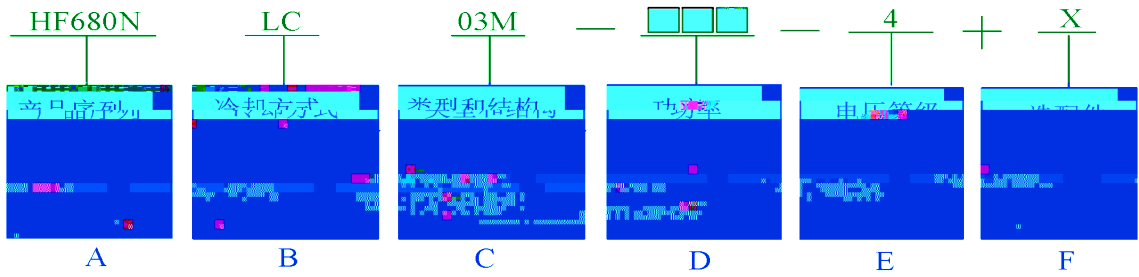

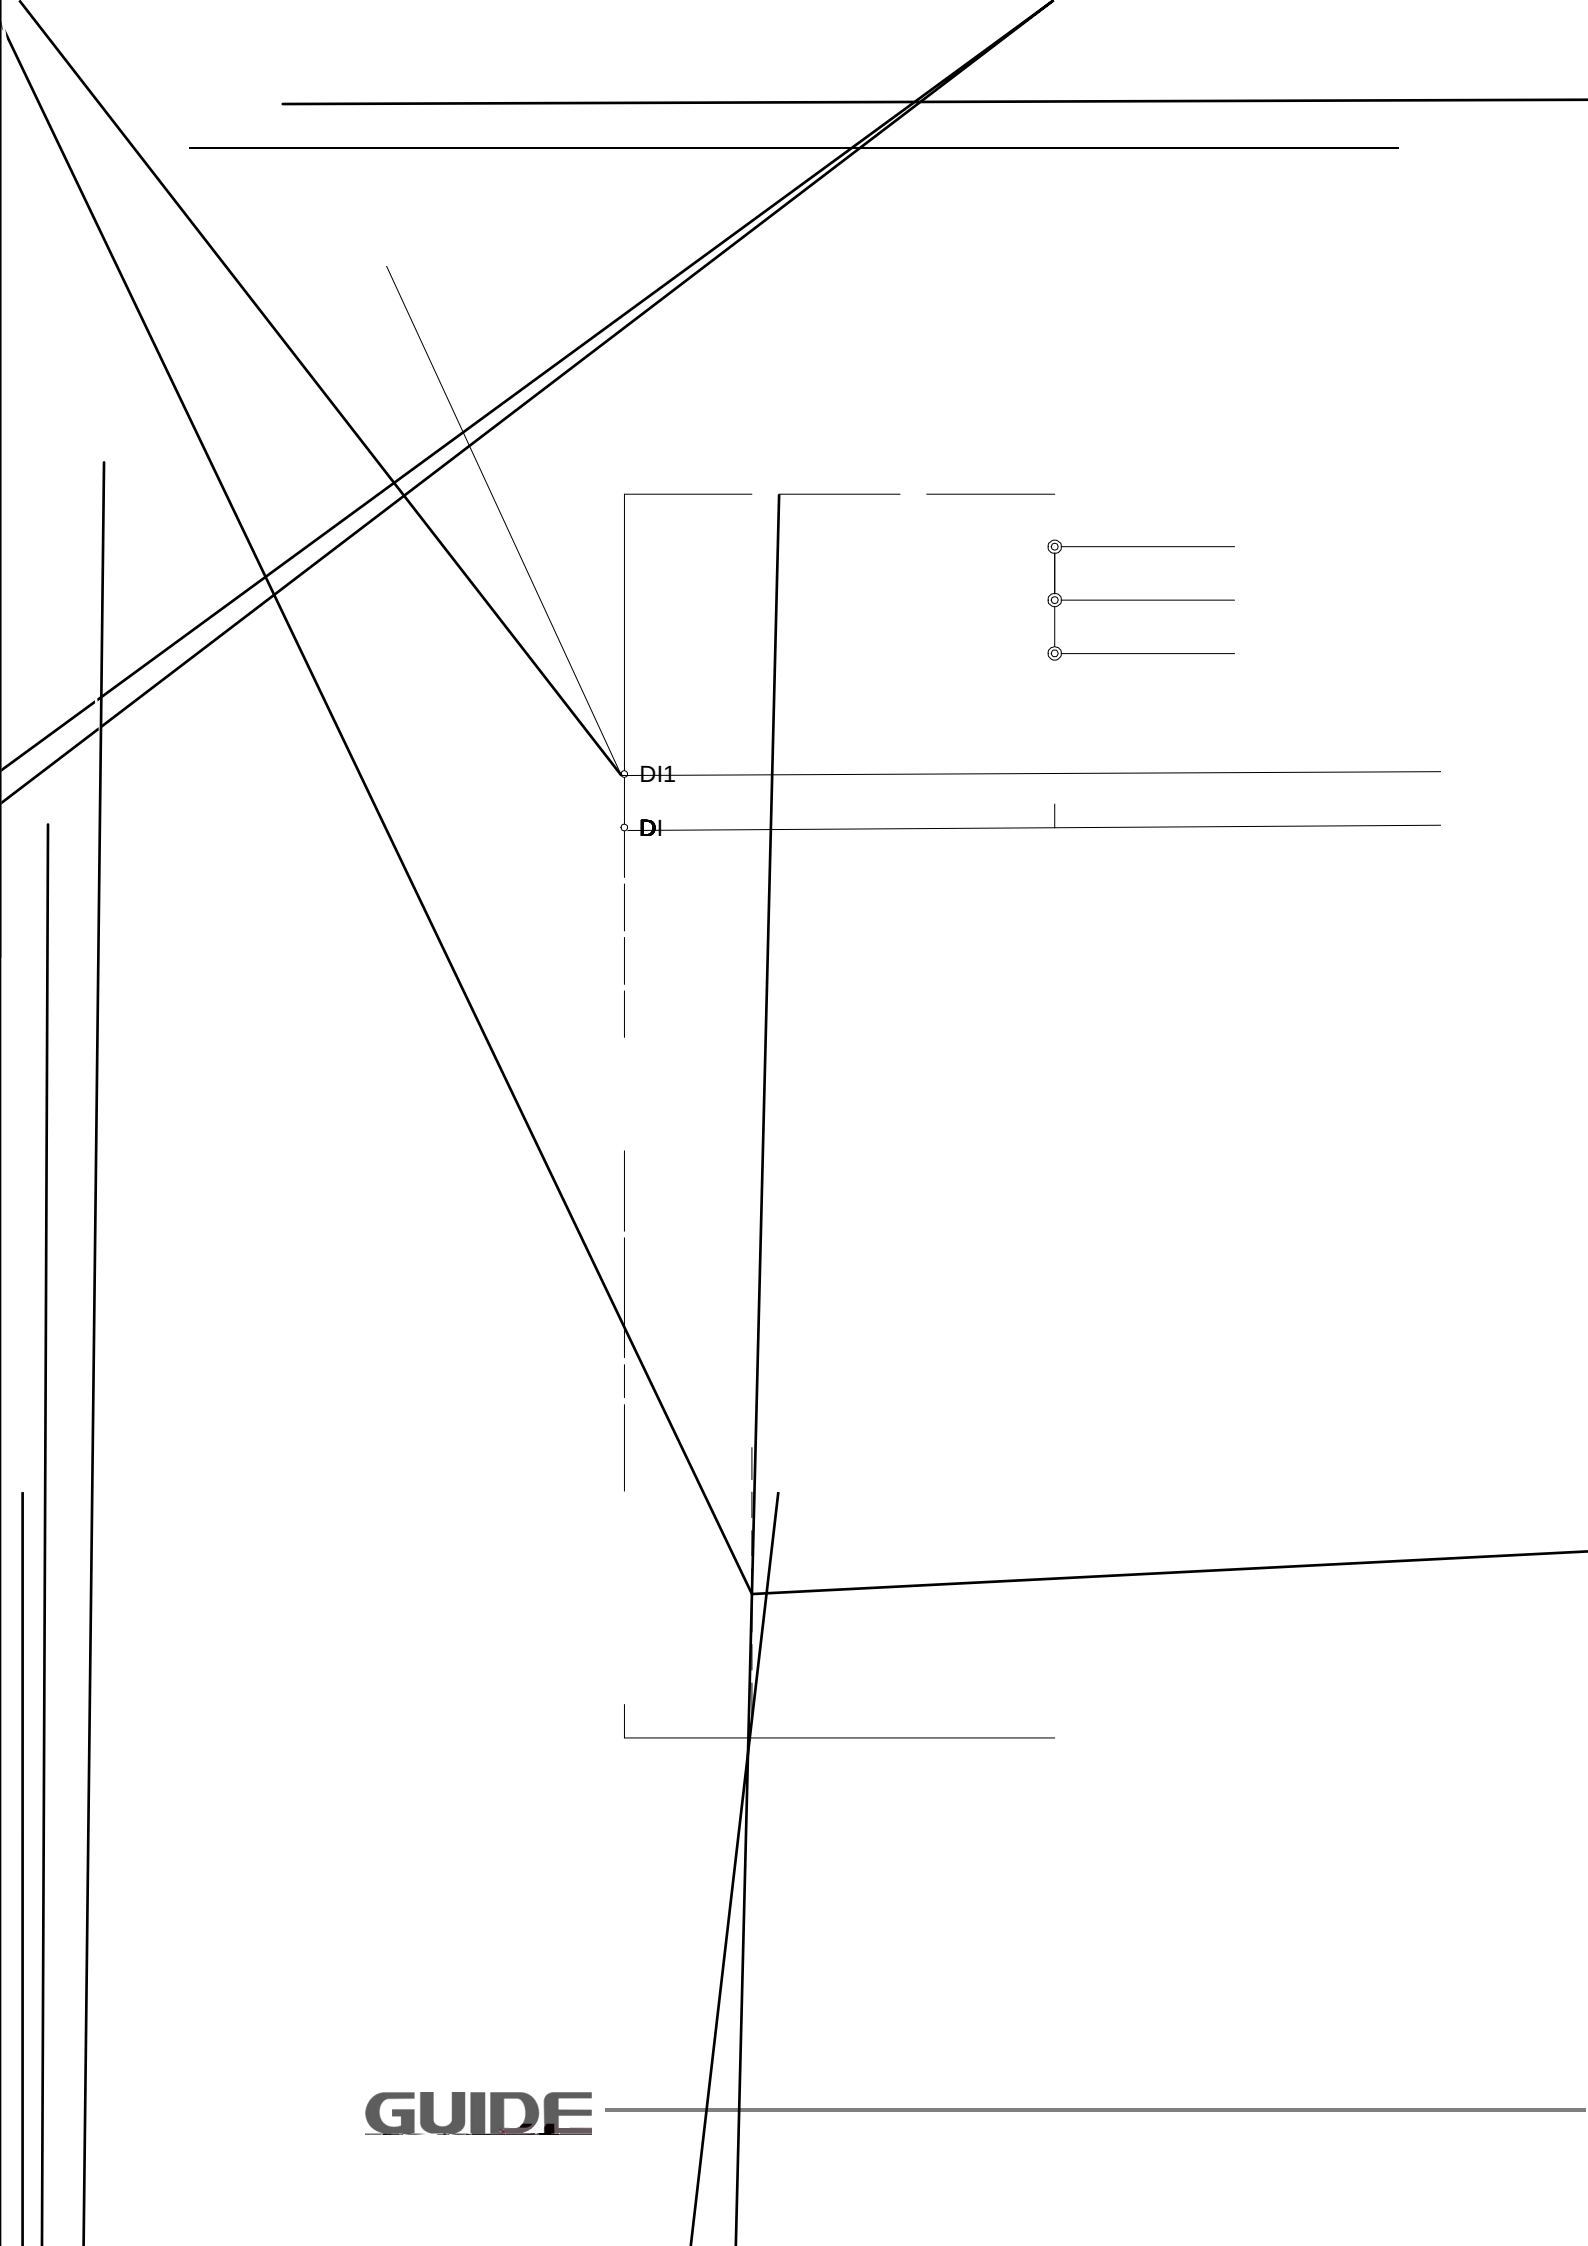

GUIDE

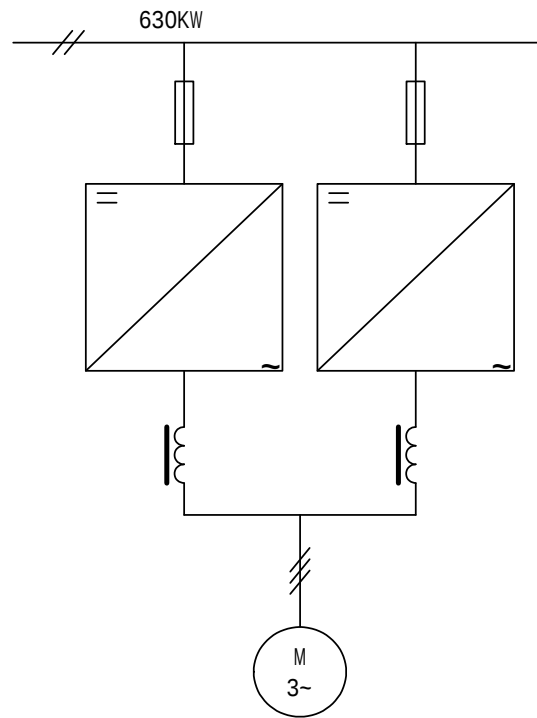
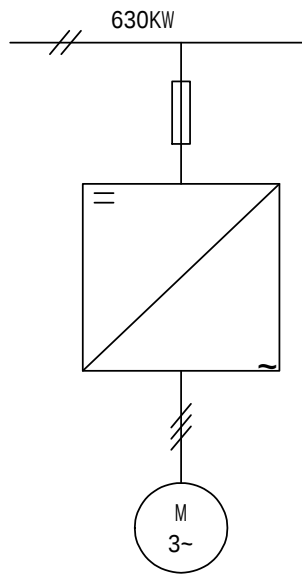


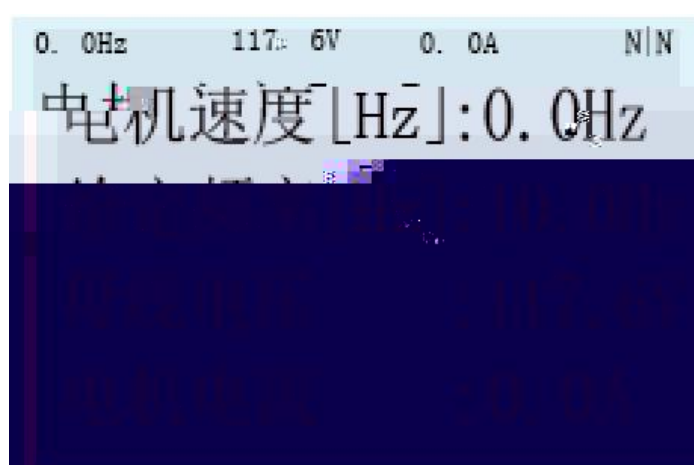




--	--	--


--	--	--

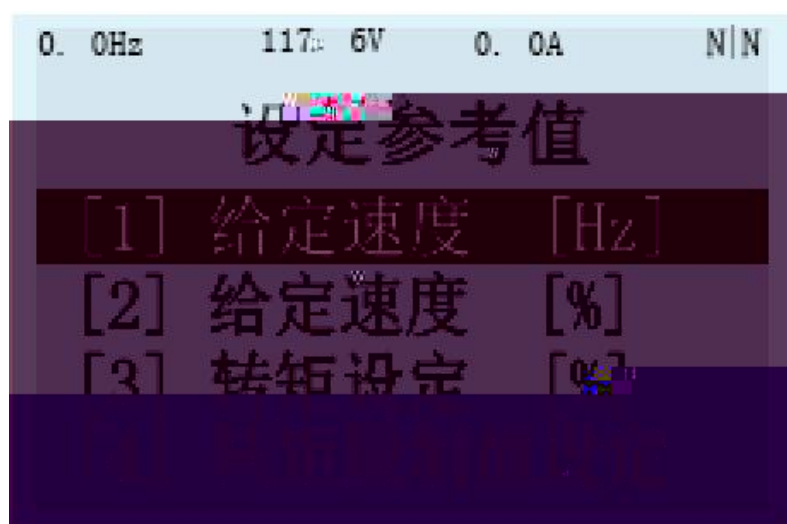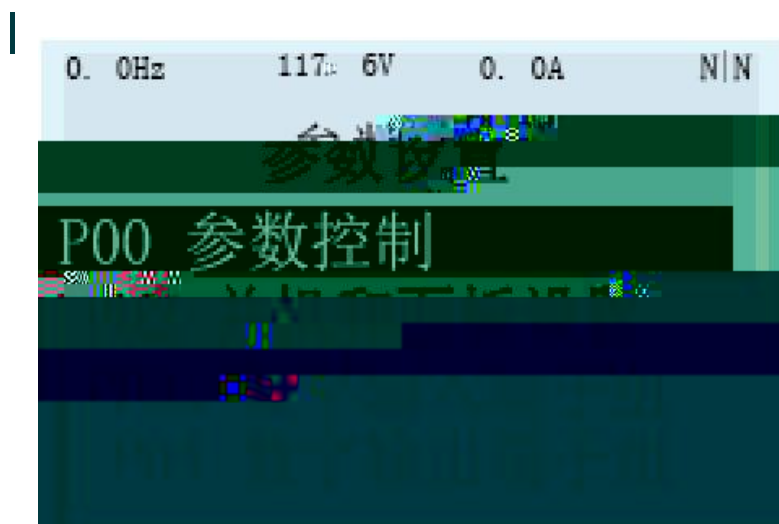



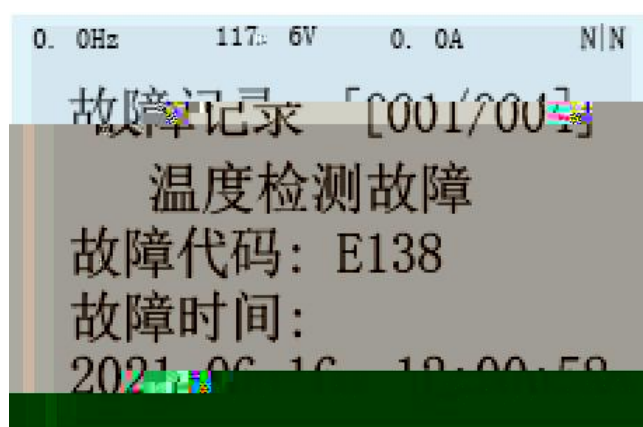




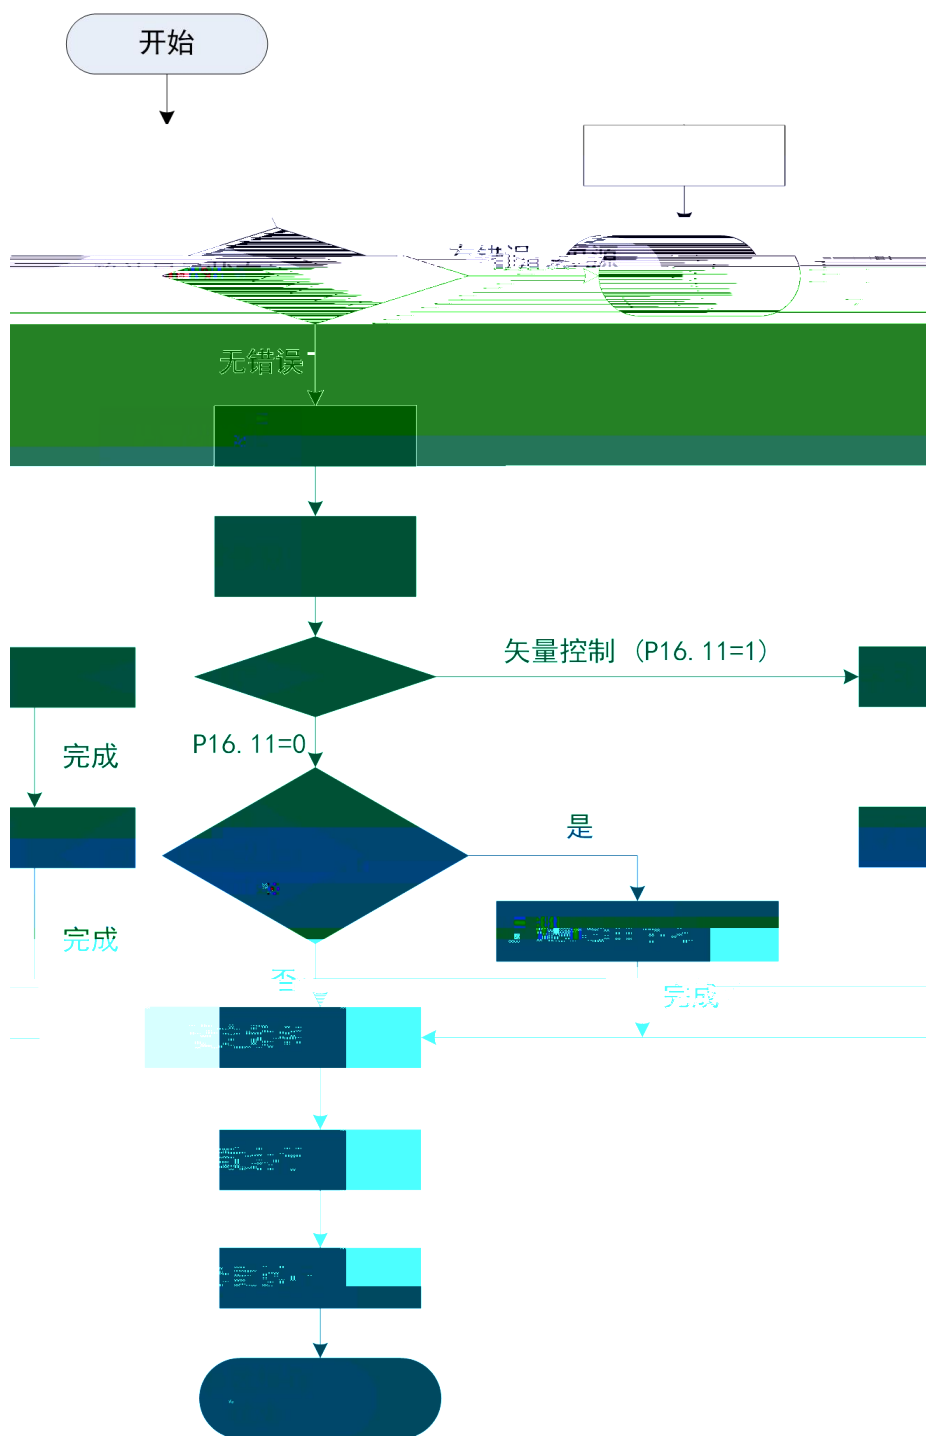

Ä ; A50 Ð(æ

A

H

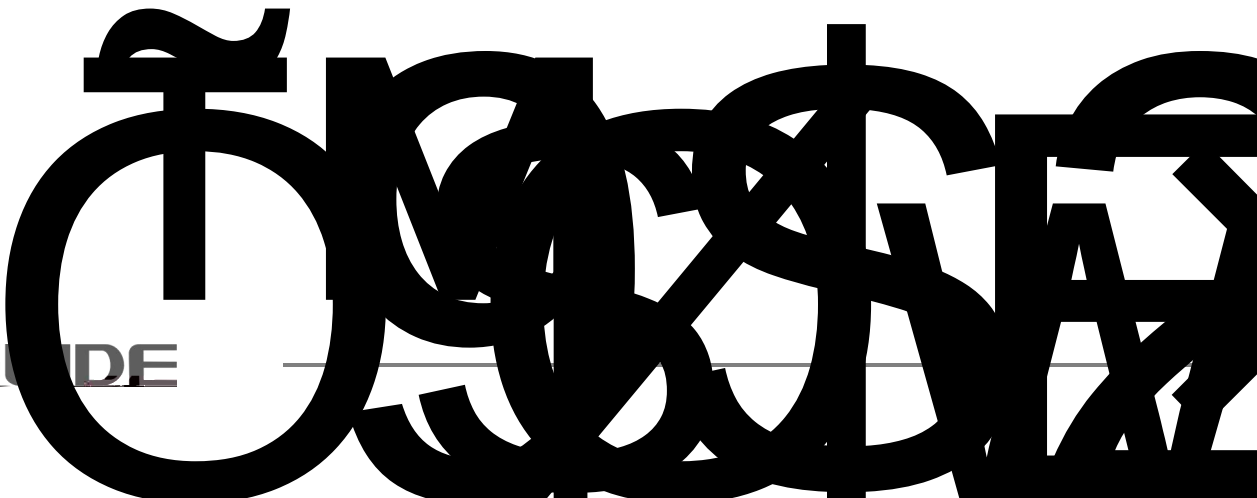

参数	名称	值	单位
100.15	DO 功能本地测试 1	1	
100.16	DO 功能本地测试 2	0	
100.17	DO 功能本地测试 3	0	



[illegible][illegible]


F 0;

运行


停止



运行

È



Ã



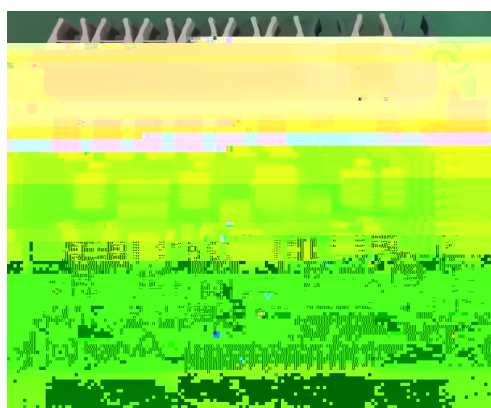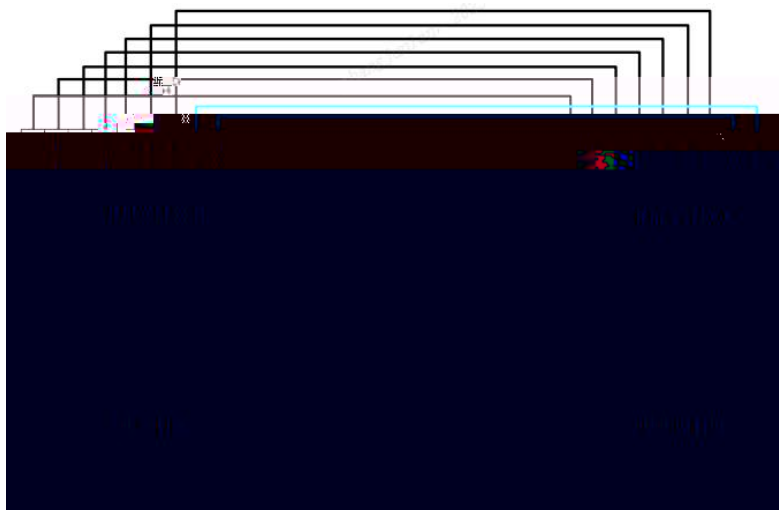

δ

PIN

参数	名称	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2
101.5	数字量输入端子 [01 ~ 16]															
101.6	数字量输出端子 [01 ~ 16]															

!B3

!B3



È

F9j

运行

停止

运行

\$

停止

Q

Ã

O, Q È

停止


Q

停止

J

68

+6

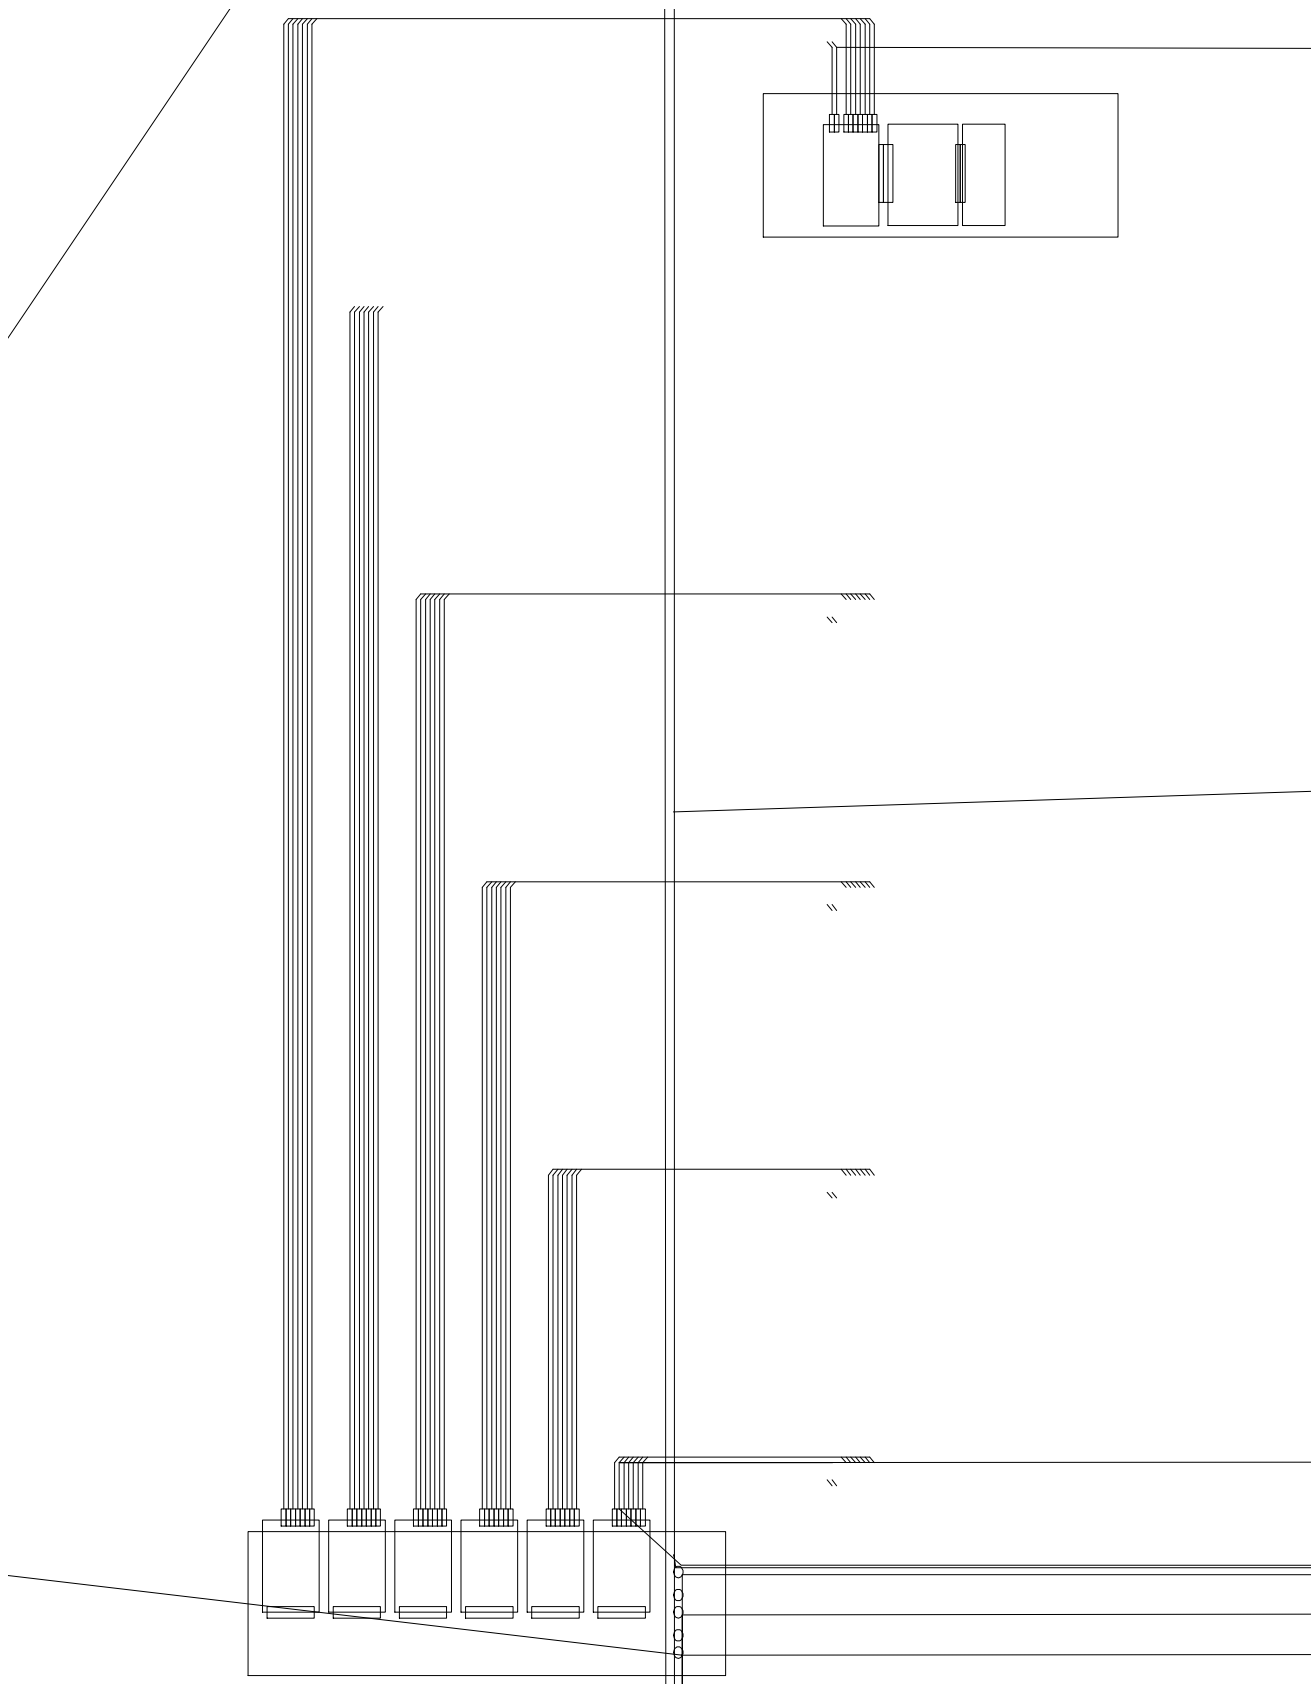




参数	名称	16	13	12	11	10	9	8	7	6	5	4	3	2
101.5	数字量输入端子 [01 ~													
101.6	数字量输出端子 [01 ~ 16]													


P24.7	0V	ADJ V1.12
-------	----	--------------

P16.0 P24.7 =P16.0
+P24.7


P16.0 375V 580V
375V P16.0 400V 600V
400V P16.0 430V 630V
430V P16.0 450V 665V
450V P16.0 460V 680V
P16.0 460V 700V

620V P16.0 380V P24.7 20V
620V
220V 220V

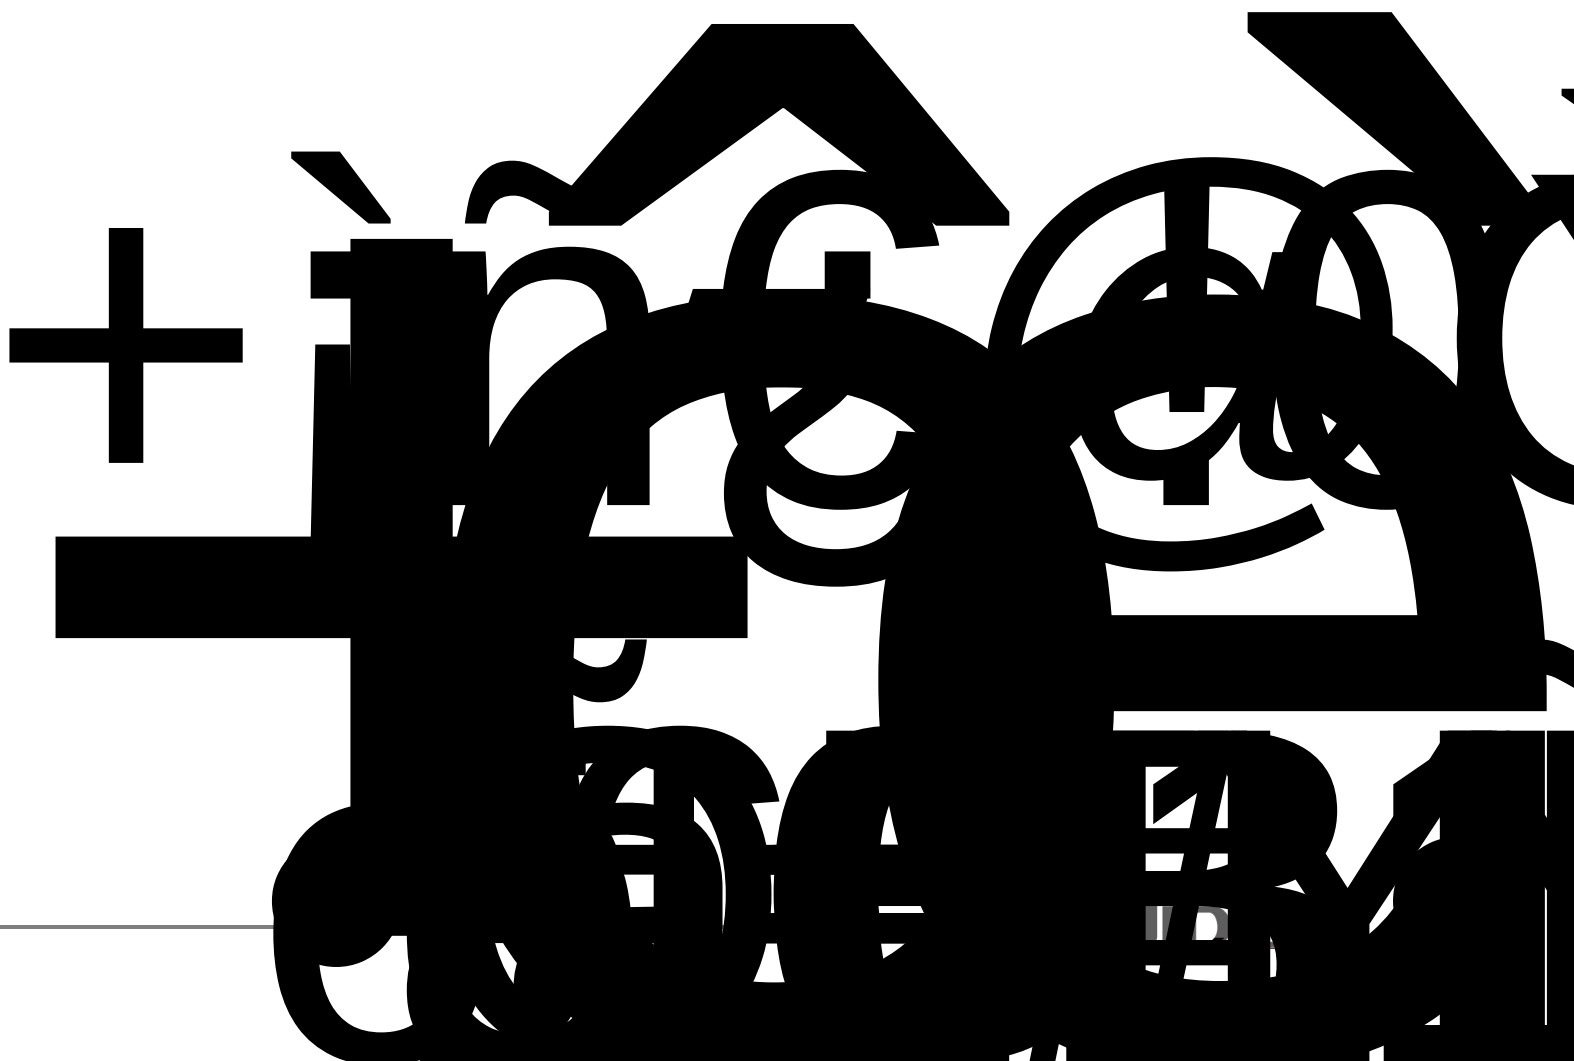

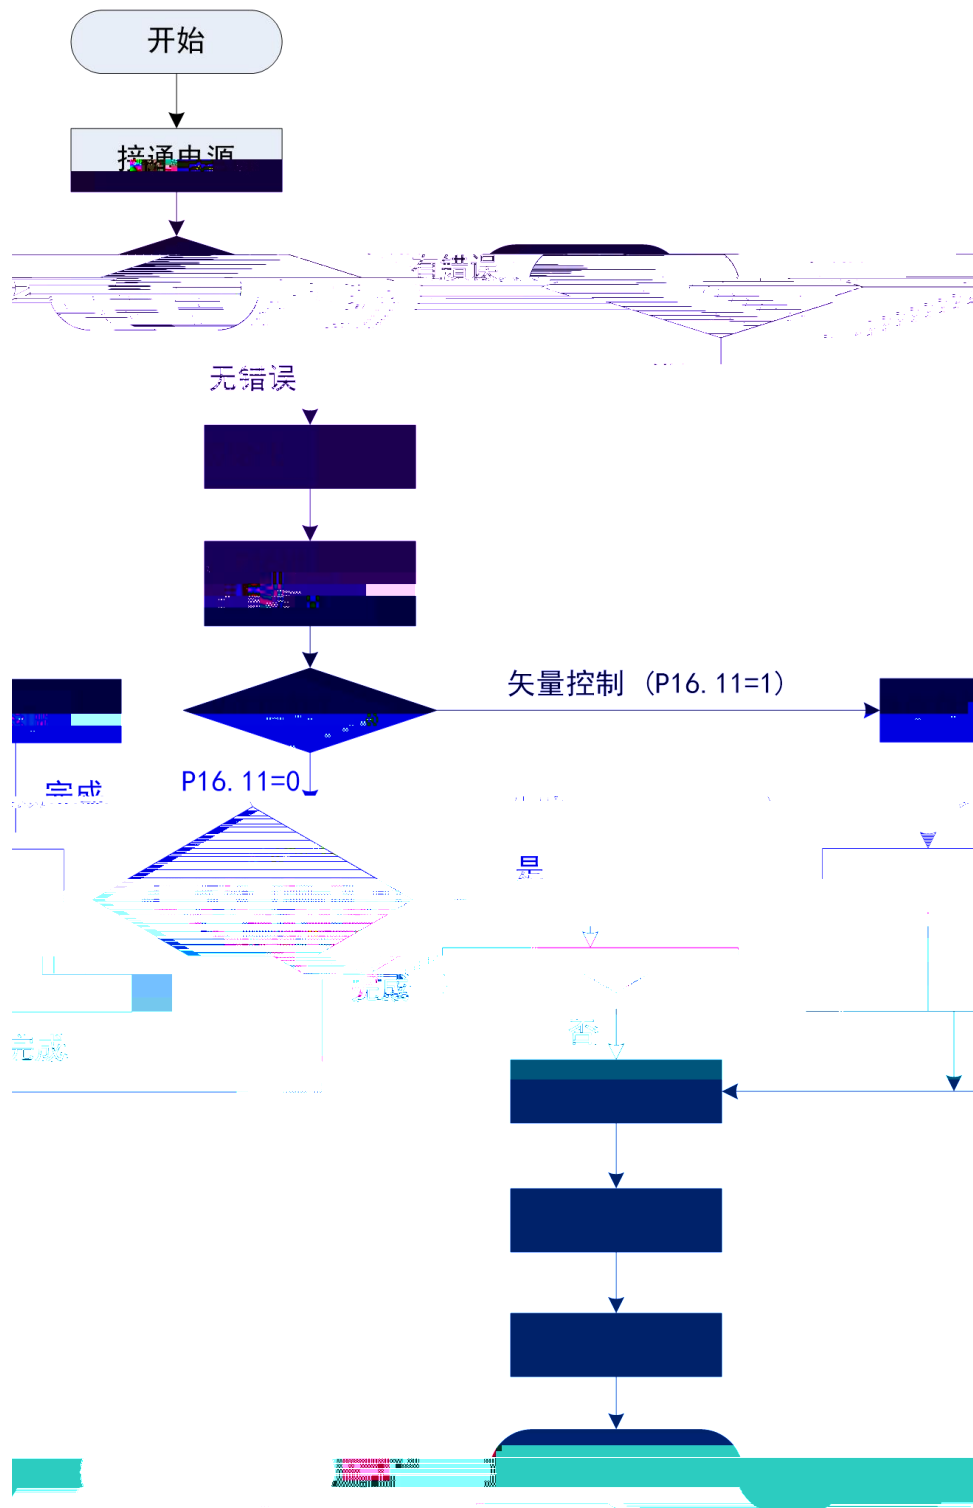

0.0Hz	560.5V	0A	N/N
电机速度[Hz]：	0 Hz		
给定频率[Hz]：	0 Hz		
母线电压：	560 V		




0.0Hz	300V	0A	W/E
-------	------	----	-----

\$A

> 3. 180

> 3



L€

6

“” ■ M' ●

GUIDE

400V

HF680NLC

250-630kW

1.00

GUIDE

Wuhan GUIDE Technology Co.,Ltd